



Specification Sheet

13-3/8" Open Hole Hydraulic System



The XpressDrill™ open-hole wellbore departure system provides a reliable sidetrack across a wide variety of wellbore conditions and applications. Solid anchoring into formation is achieved through the Extended Reach hydraulically set anchor. Cement plugs, or other restrictions in the wellbore, are not required for successful operation. A 2.5-degree whipstock face ensures separation from the existing wellbore with minimal dogleg severity. The XpressMill™ milling assembly, dressed to full gauge with a combination of Premium PDC inserts and Tungsten Carbide, is designed to mill all casing grades and formations. Orientation can be achieved through MWD or Surface Read Gyro tools.

XpressDrill™ Whipstock Slide

Length	305.0"
Face Length	231.0"
OD	11.5"

Spacer Sub

Length	96.0"
OD	8.00"
ID	3.00"

Extended Reach Hydraulic Anchor

Max Tool OD, in (retracted)	12.00"
Max Tool OD, in (extended)	16.50"
Length	73.25"
Push capacity, lbs.	150,000
Maximum torque, ft.lbf	75,000

Running Tool


Length	100.0"
OD	8.00"
Connection up/down	6-5/8 FH BOX x BOX

By-Pass Valve

Length	42.0"
OD	8.00"
Connection up/down	6-5/8 Regular BOX 6-5/8 FH PIN

XpressMill™ Milling Assembly

Length	125.3"
Mill OD	12.25"
Fishing Neck OD	8.00"
Connection up	6-5/8 FH PIN

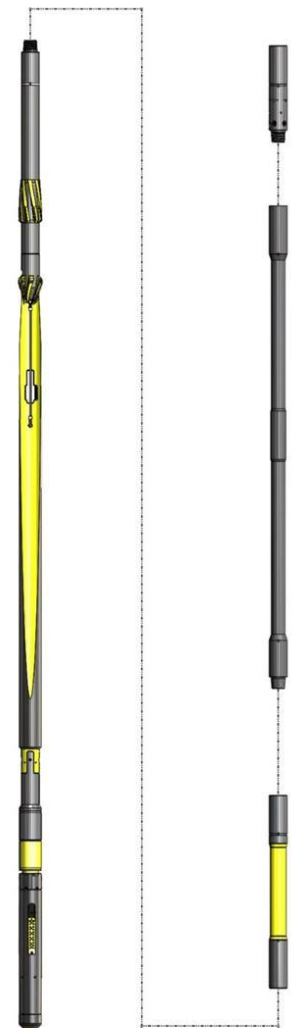



Specification Sheet

13-3/8" Open Hole Hydraulic System



The XpressDrill™ open-hole wellbore departure system provides a reliable sidetrack across a wide variety of wellbore conditions and applications. Solid anchoring into formation is achieved through the Extended Reach hydraulically set anchor. Cement plugs, or other restrictions in the wellbore, are not required for successful operation. A 2.5-degree whipstock face ensures separation from the existing wellbore with minimal dogleg severity. The XpressMill™ milling assembly, dressed to full gauge with a combination of Premium PDC inserts and Tungsten Carbide, is designed to mill all casing grades and formations. Orientation can be achieved through MWD or Surface Read Gyro tools.

XpressDrill™ Whipstock Slide

Length	305.0"
Face Length	231.0"
OD	11.5"

Spacer Sub

Length	96.0"
OD	8.00"
ID	3.00"

Extended Reach Hydraulic Anchor

Max Tool OD, in (retracted)	12.00"
Max Tool OD, in (extended)	16.50"
Length	73.25"
Push capacity, lbs.	150,000
Maximum torque, ft.lbf	75,000

Running Tool

Length	100.0"
OD	8.00"
Connection up/down	6-5/8 FH BOX x BOX

By-Pass Valve

Length	42.0"
Mill OD	8.00"
Connection up/down	6-5/8 Regular BOX 6-5/8 FH PIN

XpressMill™ Milling Assembly

Length	125.3"
Mill OD	12.25"
Fishing Neck OD	8.00"
Connection up	6-5/8 FH PIN

