



# Specification Sheet

## 7-5/8" Open Hole System



The XpressDrill™ open-hole wellbore departure system provides a reliable sidetrack across a wide variety of wellbore conditions and applications. Solid anchoring into formation is achieved through the Extended Reach hydraulically set anchor. Cement plugs, or other restrictions in the wellbore, are not required for successful operation. A 2.5-degree whipstock face ensures separation from the existing wellbore with minimal dogleg severity. The XpressMill™ milling assembly, dressed to full gauge with a combination of Premium PDC inserts and Tungsten Carbide, is designed to mill all casing grades and formations. Orientation can be achieved through MWD or Surface Read Gyro tools.

### XpressDrill™ Whipstock Slide

Length	161.3"
Face Length	107"
OD	5.88"

### Spacer Sub

Length	96.0"
OD	5.625"
ID	2.0"

### Extended Reach Hydraulic Anchor

Max Tool OD, in (retracted)	5.625"
Max Tool OD, in (extended)	9.36"
Length	56.63"
Push capacity, lbs.	100,000
Maximum torque, ft.lbf	15,000

### Running Tool


Length	70"
OD	4.75"
Connection up/down	3-1/2 API IF BOX

### By-Pass Valve

Length	40.0"
OD	4.75"
Connection up/down	3-1/2 IF BOX/ PIN

### XpressMill™ Milling Assembly

Length	72"
Mill OD	6-3/4"
Fishing Neck OD	4.75"
Connection up	3-1/2 API IF PIN

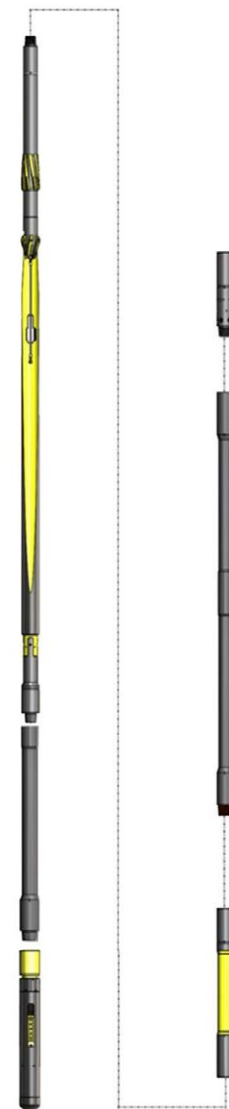



# Specification Sheet

## 7-5/8" Open Hole System



The XpressDrill™ open-hole wellbore departure system provides a reliable sidetrack across a wide variety of wellbore conditions and applications. Solid anchoring into formation is achieved through the Extended Reach hydraulically set anchor. Cement plugs, or other restrictions in the wellbore, are not required for successful operation. A 2.5-degree whipstock face ensures separation from the existing wellbore with minimal dogleg severity. The XpressMill™ milling assembly, dressed to full gauge with a combination of Premium PDC inserts and Tungsten Carbide, is designed to mill all casing grades and formations. Orientation can be achieved through MWD or Surface Read Gyro tools.

### XpressDrill™ Whipstock Slide

Length	161.3"
Face Length	107"
OD	5.88"

### Spacer Sub

Length	96.0"
OD	5.625"
ID	2.0"

### Extended Reach Hydraulic Anchor

Max Tool OD, in (retracted)	5.625"
Max Tool OD, in (extended)	9.36"
Length	56.63"
Push capacity, lbs.	100,000
Maximum torque, ft.lbf	15,000

### Running Tool

Length	70"
OD	4.75"
Connection up/down	3-1/2 API IF BOX

### By-Pass Valve

Length	40.0"
Mill OD	4.75"
Connection up/down	3-1/2 IF BOX/ PIN

### XpressMill™ Milling Assembly

Length	72"
Mill OD	6-3/4"
Fishing Neck OD	4.75"
Connection up	3-1/2 API IF PIN

