



Specification Sheet

7-5/8" Cased Hole Mechanical System



The XpressDrill™ cased hole mechanical whipstock delivers a high quality full gauge window in a single trip. A reliable and cost saving- bottom trip anchor can be set on top of float equipment, a bridge plug, cement retainer or a fish left in the hole. A 2.5-degree whipstock face ensures separation from the existing wellbore with minimal dogleg severity. The XpressMill™ milling assembly, dressed to full gauge with a combination of Premium PDC inserts and Tungsten Carbide, is designed to mill all casing grades and formations. Orientation can be achieved through MWD or Surface Read Gyro tools.

7-5/8" Cased Hole Whipstock with Mechanical Anchor Specifications

Whipstock Slide

Length	132"
Face Length	107"
OD	5.88"

Mechanical Anchor - Bottom Trip


Anchor size	7 5/8" Casing
Max Tool OD, in (retracted)	6.25"
Length, ft	69.5"

Running Tool

Length	70"
OD	4.75"
Connection up/down	3-1/2 API IF BOX

XpressMill™ Milling Assembly

Length	72"
OD	6-1/8"
Fishing Neck OD	4.75"
Connection up/down	3-1/2 API IF PIN

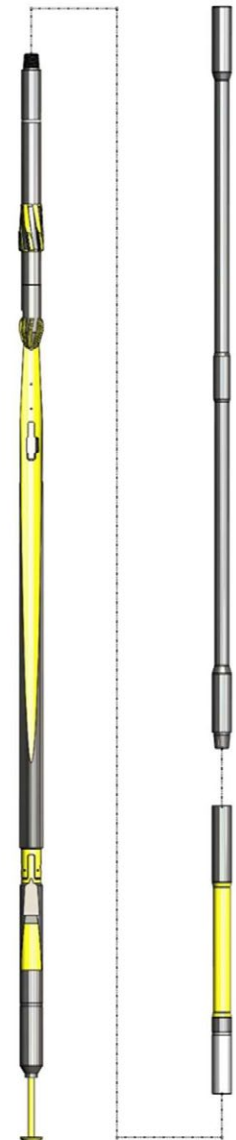



Specification Sheet

7-5/8" Cased Hole Mechanical System



The XpressDrill™ cased hole mechanical whipstock delivers a high quality full gauge window in a single trip. A reliable and cost saving- bottom trip anchor can be set on top of float equipment, a bridge plug, cement retainer or a fish left in the hole. A 2.5-degree whipstock face ensures separation from the existing wellbore with minimal dogleg severity. The XpressMill™ milling assembly, dressed to full gauge with a combination of Premium PDC inserts and Tungsten Carbide, is designed to mill all casing grades and formations. Orientation can be achieved through MWD or Surface Read Gyro tools.

7-5/8" Cased Hole Whipstock with Mechanical Anchor Specifications

Whipstock Slide

Length	132"
Face Length	107"
OD	5.88"

Mechanical Anchor - Bottom Trip

Anchor size	7 5/8" Casing
Max Tool OD, in (retracted)	6.25"
Length	69.5"

Running Tool

Length	70"
OD	4.75"
Connection up/down	3-1/2 API IF BOX

XpressMill™ Milling Assembly

Length	72"
OD	6-1/8"
Fishing Neck OD	4.75"
Connection up/down	3-1/2 API IF PIN

