



## Specification Sheet

# 2.88" Wildcat Oil Tools XTR™ ERT 4.0 Coil Tubing Tool

We have designed the power section and valve assemblies for the Wildcat Oil Tools XTR™ ERT 4.0 CT tool to improve performance and reliability. The power section design allows you to pump at higher flow rates at reduced pump through pressures. The valve assemblies were designed to work at optimum operational frequencies. These improvements produce axial forces that work to reduce buckling, the Wildcat Oil Tools XTR™ ERT 4.0 CT tool allows for increased weight-on-bit, improving your rate of penetration and helping you reach total depth.

### Benefit

- Extends your reach by reducing friction downhole
- Improves rate of penetration (ROP) by allowing for increased weight on bit (WOB)
- Power section and valve assemblies allows for higher flow rates at lower pump through pressures
- Delays sinusoidal and helical buckling by reducing weight stacking

### Application

- Extended Reach Plug Milling
- Coiled Tubing Drilling
- Wellbore Cleaning


## 4.0 Tool

<b>Tool Size</b>	2.88"
<b>Overall Length</b>	54"
<b>Temperature Range</b>	150-360F
<b>Weight</b>	75 lbs
<b>Operational Flow Range</b>	1 - 4 BPM
<b>Pressure Range (Static)</b>	10,000 psi
<b>Operational Frequency</b>	8 Hz @ 126 gpm
<b>Max Tensile</b>	85,000 lbs
<b>Pressure Pulse</b>	500 - 2,000 psi
<b>Top Connection</b>	2 3/8" PAC Box
<b>Bottom Connection</b>	2 3/8" PAC Pin



## Chart

### Wildcat Oil Tools XTR™ Test Chart @ 3 BBL/MIN

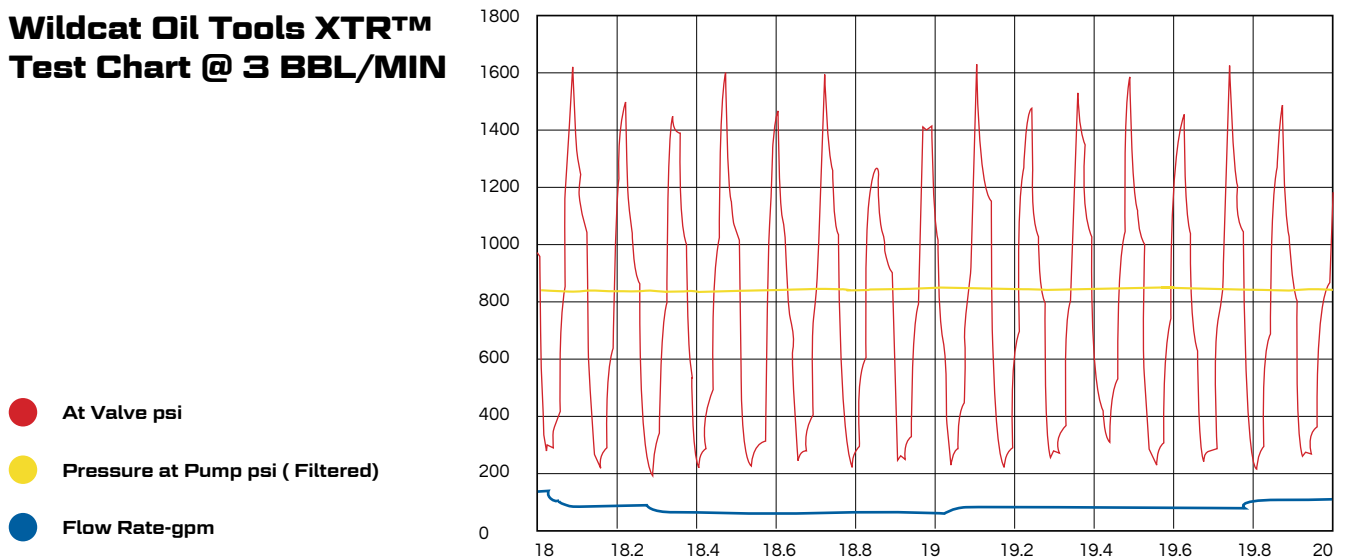



## Specification Sheet

# 2.88" Wildcat Oil Tools XTR™ ERT 4.0 Coil Tubing Tool

We have designed the power section and valve assemblies for the Wildcat Oil Tools XTR™ ERT 4.0 CT tool to improve performance and reliability. The power section design allows you to pump at higher flow rates at reduced pump through pressures. The valve assemblies were designed to work at optimum operational frequencies. These improvements produce axial forces that work to reduce buckling, the Wildcat Oil Tools XTR™ ERT 4.0 CT tool allows for increased weight-on-bit, improving your rate of penetration and helping you reach total depth.

### Benefit

- Extends your reach by reducing friction downhole
- Improves rate of penetration (ROP) by allowing for increased weight on bit (WOB)
- Power section and valve assemblies allows for higher flow rates at lower pump through pressures
- Delays sinusoidal and helical buckling by reducing weight stacking

### Application

- Extended Reach Plug Milling
- Coiled Tubing Drilling
- Wellbore Cleaning

### 4.0 Tool

<b>Tool Size</b>	2.88"
<b>Overall Length</b>	54"
<b>Temperature Range</b>	150-360F
<b>Weight</b>	75 lbs
<b>Operational Flow Range</b>	1 - 4 BPM
<b>Pressure Range (Static)</b>	10,000 psi
<b>Operational Frequency</b>	8 Hz @ 126 gpm
<b>Max Tensile</b>	85,000 lbs
<b>Pressure Pulse</b>	500 - 2,000 psi
<b>Top Connection</b>	2 3/8" PAC Box
<b>Bottom Connection</b>	2 3/8" PAC Pin



### Chart

**Wildcat Oil Tools XTR™  
Test Chart @ 3 BBL/MIN**

